


CARBOPIU 28/112 CORRUGATED SHEET COMPACT

SHEET SECTION

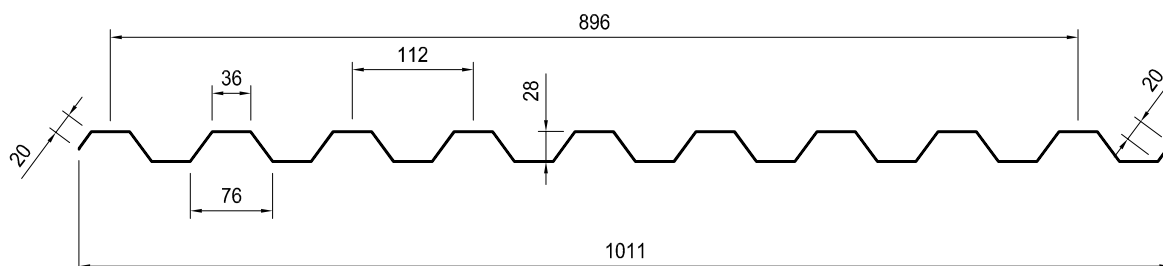

ITEM OF SPECIFICATION

Corrugated sheets in compact polycarbonate with outer side protected from U.V. rays (fret 28/112), pitch of sheet 1010 ± 5 mm. Use: completion of skylights, transparent roofing and wall coatings. Ideal for combination with corrugated sheets H 28 mm, ALUBEL A - COPERNIT - EDILFIBRO type.

The corrugation has the following characteristics:

- Height of fret: H ~28 mm
- Pitch of fret: 112 mm
- Lateral overlap: one fret and a half

Laying tips: see attached data sheet.

TECHNICAL CHARACTERISTICS

• THICKNESS	1 mm
• SHEET PITCH	~1011 ± 5 mm (SHEET WIDTH)
• USEFUL PITCH IN STRUCTURE	896 ± 5 mm (EQUAL TO 6 FRETS)
• SHEET LENGTH	EQUAL OR IN SUB-MULTIPLES OF 11600
• COLOUR	NEUTRAL TRANSPARENT
• TECHNICAL DATA ON SHEETS:	<ul style="list-style-type: none"> • U.V. PROTECTED ON THE OUTSIDE • FIRE CLASSIFICATION B s1 d0
• HEAT INSULATING PROPERTY	K = 0,21 W/m°C (DIN 52612)
• PASSAGE OF LIGHT	89%