


# CARBOPIU 10 mm HONEYCOMB REINFORCED

## SHEET SECTION


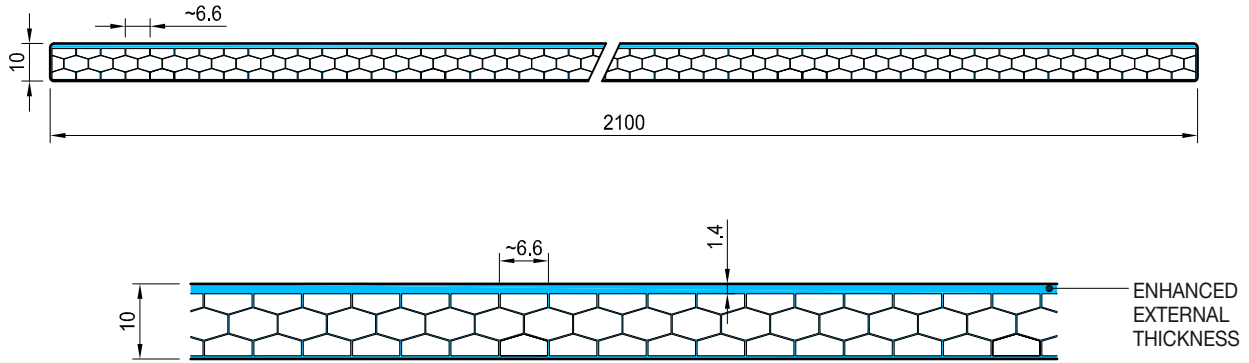


## ITEM OF SPECIFICATION

Completion of flat and curved roofing (minimum radius of cold curve 2000 mm) and vertical cladding walls with extruded sheets in alveolar polycarbonate, 10 mm thick, pitch of sheet 2100 mm, with alveolar honeycomb structure and on the outside, with reinforced thickness of 1.4 mm, protected from U.V. rays on the outside, fire classification B s1 d0. U-shaped profiles are used as finishing accessories and closure of the alveoli, the ends of the sheets are hot-welded or taped with adhesive aluminium tape, and profiles in polycarbonate or aluminium hoops may be used for any jointing of the sheets.

## TECHNICAL CHARACTERISTICS


• THICKNESS	10 mm - HONEYCOMB STRUCTURE REINFORCED ON THE OUTSIDE	
• SHEET PITCH	2100 ± 5 mm	
• SHEET LENGTH	6000 mm	
• COLOUR	NEUTRAL AND OPAL	
• CLOSURE AT THE ENDS	TAPED	
• TECHNICAL DATA ON SHEETS:	<ul style="list-style-type: none"> <li>• U.V. PROTECTED ON THE OUTSIDE</li> <li>• FIRE CLASSIFICATION B s1 d0</li> </ul>	
• HEAT INSULATING PROPERTY	U = 2,50 W/m²K	
• PASSAGE OF LIGHT	NEUTRAL 63% ± 2 - OPAL 43% ± 2	
• APPLICATION NOTES	FLAT SHEET	CURVED SHEET



Minimum Radius  
2000 mm

# CARBOPIU 20 mm HONEYCOMB REINFORCED

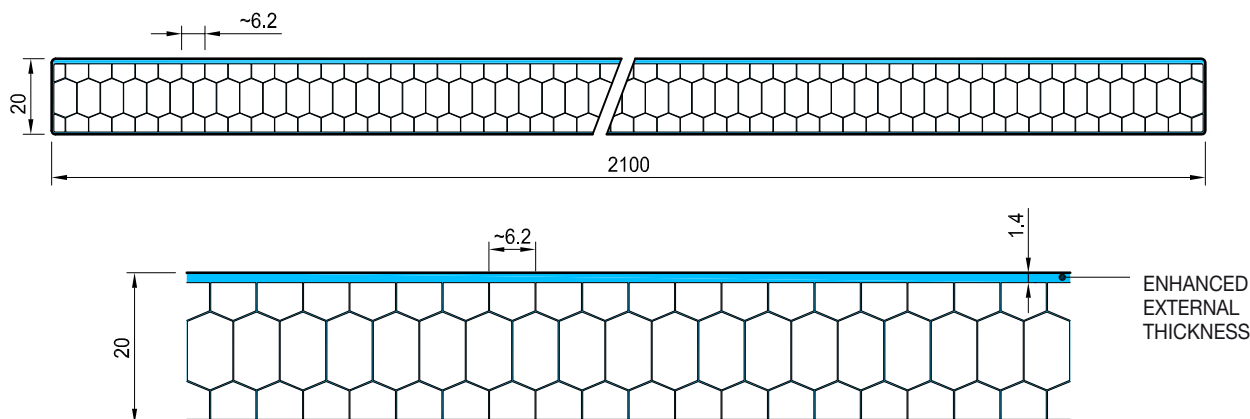

## SHEET SECTION



## ITEM OF SPECIFICATION

Completion of flat and curved roofing (minimum radius of cold curve 4000 mm) and vertical cladding walls with extruded sheets in alveolar polycarbonate, 20 mm thick, pitch of sheet 2100 mm, with alveolar honeycomb structure and on the outside, with reinforced thickness of 1.4 mm, protected from U.V. rays on the outside, fire classification B s1 d0. U-shaped profiles are used as finishing accessories and closure of the alveoli, the ends of the sheets are hot-welded or taped with adhesive aluminium tape, and profiles in polycarbonate or aluminium hoops may be used for any jointing of the sheets.

## TECHNICAL CHARACTERISTICS

• THICKNESS	20 mm - HONEYCOMB STRUCTURE REINFORCED ON THE OUTSIDE	
• SHEET PITCH	2100 ± 5 mm	
• SHEET LENGTH	6000 mm	
• COLOUR	NEUTRAL AND OPAL	
• CLOSURE AT THE ENDS	TAPED	
• TECHNICAL DATA ON SHEETS:	<ul style="list-style-type: none"> <li>• HONEYCOMB ALVEOLAR STRUCTURE</li> <li>• U.V. PROTECTED ON THE OUTSIDE</li> <li>• FIRE CLASSIFICATION B s1 d0</li> </ul>	
• HEAT INSULATING PROPERTY	U = 1,80 W/m²K	
• PASSAGE OF LIGHT	NEUTRAL 54% ± 2 - OPAL 39% ± 2	
• APPLICATION NOTES	FLAT SHEET 	CURVED SHEET  Minimum Radius 4000 mm

[www.polypiu-plast.com](http://www.polypiu-plast.com)


**polyPIUplast**<sup>®</sup>  
MULTIWALL POLYCARBONATE PANELS AND SISTEMS

Liability clause: all the indications and technical consultancy provided is given in good faith and according to the best available knowledge; however, as we have no control over our own materials' use by others, all responsibility is declined for their applications. The indications do not exonerate the purchaser from carrying out his own checks in order to determine the compliance of the materials with his own requirements and with currently applicable standards. PolyPIU-Plast S.r.l. reserves the right to make modifications without prior notice to its own products and the contents of the documentation.



# CARBOPIU 16 mm HONEYCOMB REINFORCED

## SHEET SECTION

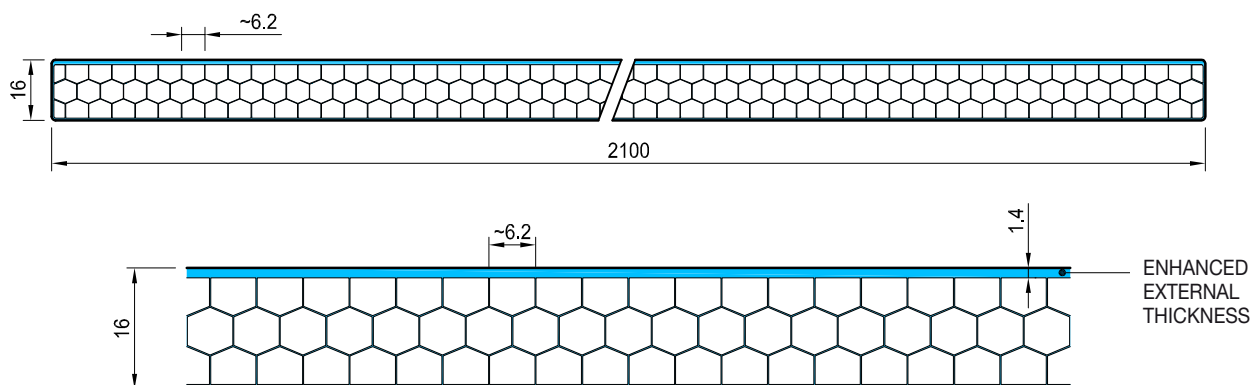


## ITEM OF SPECIFICATION

Completion of flat and curved roofing (minimum radius of cold curve 3000 mm) and vertical cladding walls with extruded sheets in alveolar polycarbonate, 16 mm thick, pitch of sheet 2100 mm, with alveolar honeycomb structure and on the outside, with reinforced thickness of 1.4 mm, protected from U.V. rays on the outside, fire classification B s1 d0. U-shaped profiles are used as finishing accessories and closure of the alveoli, the ends of the sheets are hot-welded or taped with adhesive aluminium tape, and profiles in polycarbonate or aluminium hoops may be used for any jointing of the sheets.

## TECHNICAL CHARACTERISTICS

• THICKNESS	16 mm - HONEYCOMB STRUCTURE REINFORCED ON THE OUTSIDE	
• SHEET PITCH	2100 ± 5 mm	
• SHEET LENGTH	6000 mm	
• COLOUR	NEUTRAL AND OPAL	
• CLOSURE AT THE ENDS	TAPED	
• TECHNICAL DATA ON SHEETS:	<ul style="list-style-type: none"> <li>• HONEYCOMB ALVEOLAR STRUCTURE</li> <li>• U.V. PROTECTED ON THE OUTSIDE</li> <li>• FIRE CLASSIFICATION B s1 d0</li> </ul>	
• HEAT INSULATING PROPERTY	U = 1,99 W/m²K	
• PASSAGE OF LIGHT	NEUTRAL 60% ± 2 - OPAL 35% ± 2	
• APPLICATION NOTES	FLAT SHEET	CURVED SHEET



Minimum Radius  
3000 mm

[www.polypiu-plast.com](http://www.polypiu-plast.com)

**polyPIUplast**<sup>®</sup>  
MULTIWALL POLYCARBONATE PANELS AND SISTEMS

Liability clause: all the indications and technical consultancy provided is given in good faith and according to the best available knowledge; however, as we have no control over our own materials' use by others, all responsibility is declined for their applications. The indications do not exonerate the purchaser from carrying out his own checks in order to determine the compliance of the materials with his own requirements and with currently applicable standards. PolyPIU-Plast S.r.l. reserves the right to make modifications without prior notice to its own products and the contents of the documentation.

